AUSTRALIA FOLDING ARM AWNING

GLOBAL AWNING ACCESSORIES

awning the italian way

WWW.GLOBALAWNINGS.COM.AU

FEATURES

- 40mm x 40mm square bar.
- 70mm Galvanised roller tube to 5000mm, 78mm thereafter.
- 7:1 Gearbox is standard – awnings over 6000mm should be motorised.
- Styled heavy extruded front bar.
- Heavy duty arms with stainless steel chain.
- Awning width from 1910mm to 12000mm
- Projection from 1600mm to 3600mm – we have the largest arm size range in Australia. BAT do not recommend 4100 arms for the Australia Folding Arm Awning. If wanting 4100mm arms, please select our Global 2020 Folding Arm Awning.
- Customer adjustable pitch control on each arm is an optional extra – adjustment range 5 degrees to 60 degrees.
- Extendable front valance is available as an option (1200mm drop using hemmed acrylic or 2000mm using unhemmed acrylic).
- Gives great sun protection when needed and can be retracted when required.

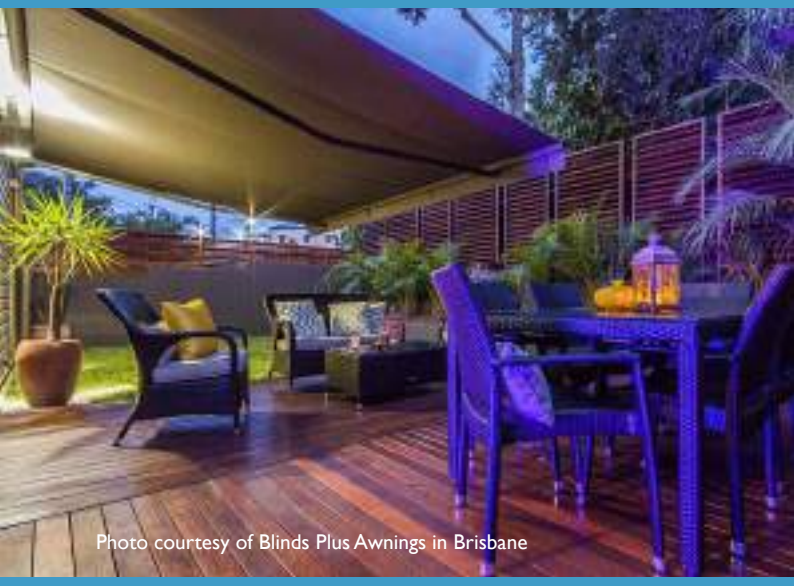

Photo courtesy of Blinds Plus Awnings in Brisbane

Projection (Arm Size mm)	Minimum Width	Minimum Width with Crossed Arms
1600	1910	1290
1850	2160	1415
2100	2410	1540
2350	2660	1665
2600	2910	1790
2850	3160	1915
3100	3410	2040
3600	3910	2290

*4100 arms not suitable.

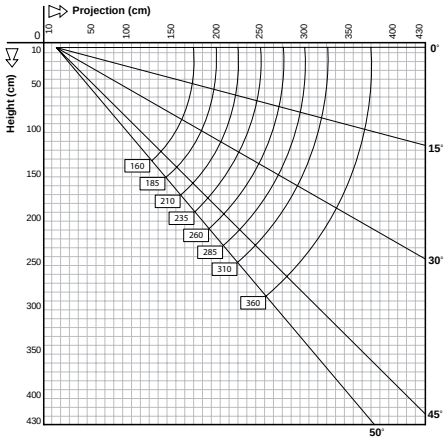



Australia R-90 Wall/Face Fix



Australia R-90 Ceiling/Top Fix



Australia R-90 Cross Over Arms



Australia R-Pitch Wall/Face Fix



Australia R-Pitch Ceiling/Top Fix

Australia Pitch Control Folding Arm Awning

Australia R-90 Folding Arm Awning

1200 cm

360 cm

2

Wind Class 2 (European) / Beaufort Force 5 (Australian)

Maximum wind speed of 37kms

Colour Options are White, Ivory, Silver Grey or Anthracite Texture. Other standard Dulux Duralloy or Interpon Textura powder-coat colours are available at an additional cost.

WHITE IVORY SILVER GREY ANTHRACITE

YOUR GLOBAL AWNING ACCESSORIES DEALER

WWW.GLOBALAWNINGS.COM.AU