SCREENY TENSION ZIP SYSTEM

GLOBAL AWNING ACCESSORIES







FEATURES

- Screeny I30 is designed to fit windows, niche and Other vertical appplications, over glass roofs or pergolas, to assist in heat reduction by shading the glass or the deck.
- Uses a 78mm keyway tube
- Vertical Application maximum size 5 metre wide with 5 metre projection
- Horizontal application maximum size 4 metre wide with 5 metre projection
- Optional twin channel available
- This product is only available motorised
- Several dirrerent fixing brackets are available a as options –
 - Head-box mount brackets
 - Side channel fix brackets
 - Adjustable cassette mount brackets (used with head-box mount brackets)
 - Side adjustable brackets
 - Extra height bracket







Wind Class 2 (European) / Beaufort Force 5 (Australian)

Maximum wind speed of 37kms

Vertical Application





Wind Class I (European) / Beaufort Force 4 (Australian)

Maximum wind speed of 27kms

Horizontal Application

Standard powder-coat colours are included in the price.





Headbox Mounting Bracke



Adjustable Cassette Mounting Bracket




Sideways Adjustable Fixing Bracket



Pitch Adjusting Fixing Bracket including Extra Height Profile



Standard Guide Fixing Bracket

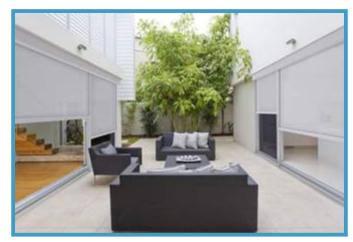



YOUR GLOBAL AWNING ACCESSORIES DEALER